

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 25 TOWNSHIP 17 RANGE 2

DATE: 4-15-02

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 8-11-97

IN. S.P.C. E ZONE NAD '83

NAME: 17022503

N: 516213.7340(m)

E: 50891.1180(m)

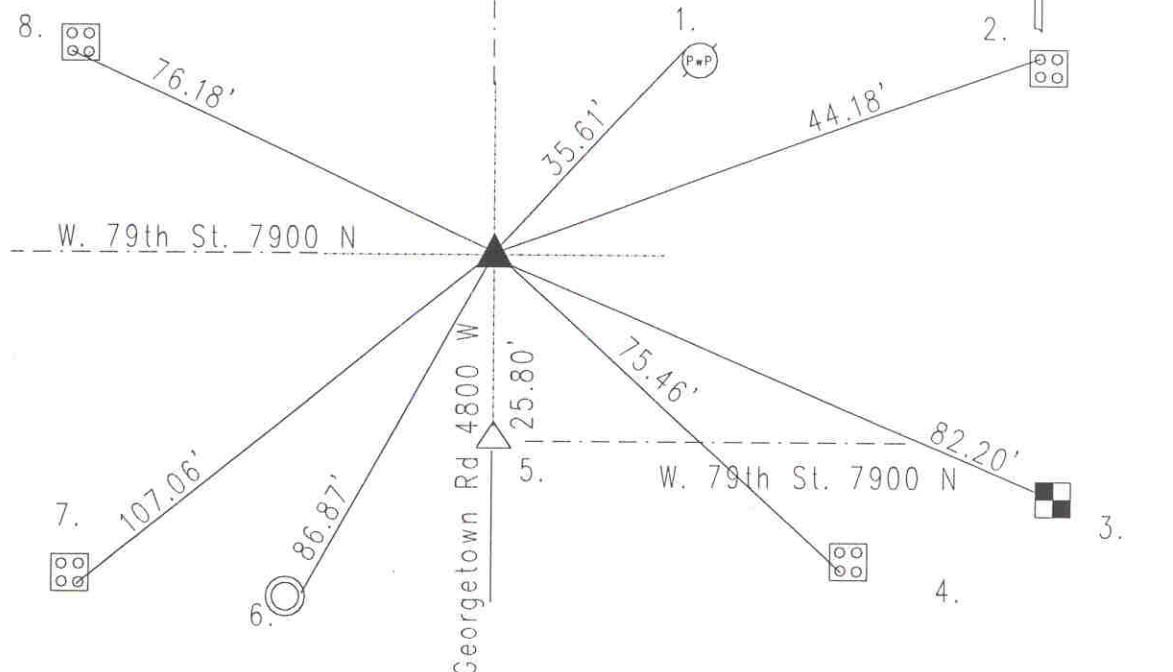

Original post set 1821 by Laughlin with witnesses: 20" ash S 44 W 28 links; 24" ash N 56 E 14 links. Originally a Class "A" monument with a cross that was down 6". 8-7-59 Hankins called corner a brass plug with steel box. 5-8-75 Miller called the same. Re-tied corner. 11-18-87 Gries re-tied brass plug with steel box. Excavated 10-4-89 by Wilcoxon. Harrison set. 8-11-97. Re-tied 4-15-02 by Wilcoxon.

17022503

REF.	DISTANCE	DESCRIPTION
1.	35.61'	PK nail NW PwP#7-227 A 12"up
2.	44.18'	Cut 'x' NW-bolt of aluminum pole base
3.	82.20'	Cut 'x' top of concrete R/W marker
4.	75.46'	Cut 'x' SW-bolt of aluminum pole base
5.	25.80'	Due S to (bent railroad spike) NW 30-17-3
6.	86.87'	Cut 'x' E-rim of sewer manhole
7.	107.06'	Cut 'x' SE-bolt of aluminum pole base
8.	76.18'	Cut 'x' SW-bolt of aluminum pole base